



ATX LED Consultants Inc

Wall Switch LED Dimmer/Driver
with Alexa, DMX or DALI

ATX LED Consultants Inc
815-A Brazos #326
Austin Tx, 78701
512 377 6052
<http://atx-led.com>

LED Lights

P023R series

ETL 5005242 / UL 1598

Bright Cool LEDs



Product Description - low profile long life LED fixture

The P023R series of LED fixtures are ETL listed and IC rated for direct contact with insulation – recognizing it's cool operating temperatures and distributed heat (no hot spots).

Diameter	Color Temperature	Feature	Connector	Watts	Sample
4	3000 K or 3500 K	Slim Disk	Ideal 30-082	6.5	
6 1/2	3000 K or 3500 K	Slim Disk	Ideal 30-082	11.5	
4	4000 K	PIR	2.1mm	6	
3	3000 K or 3500 K	Spot	2.1mm	5.4	
4	2700 thru 4000 K	Tunable	TE 3 pin	7	
A19	3000 K	Bulb	E26	6	
B11	3000 K	Bulb	E12	6	

Specifications

Model	Hole in Ceiling mm	Drill Size Inch	Finished Outside Diameter mm	Watts	Volts	Lumens	mA	Series Drive
P023R6-36	102	4"	120	6.5	18	550	360	2
P023R6-66	102	4"	120	6	9	600	660	4
P023R11-36	169	6 5/8"	188	11.6	33	1000	360	No*
OR-A40-6W	110	4 1/4"	120	6.0	21	550	300	2
MS31008	70	3	85	5.4	9	550	600	4
P023TW7	102	4"	120	7	21	700	260	No**
P023E26	-	-	-	6	9	550	660	4
P023E12	-	-	-	6	9	550	660	4

* use the AL-Doubler for 4 leds per AL-WS-DR2

** use the AL-DALI-TW2 driver

Conventional Socket LEDs – Low Voltage, Dimmable



P023E26




E26 A19 Style




P023E12

E12 B11 style

Panel Style LED Wafers – Low Voltage Dimmable

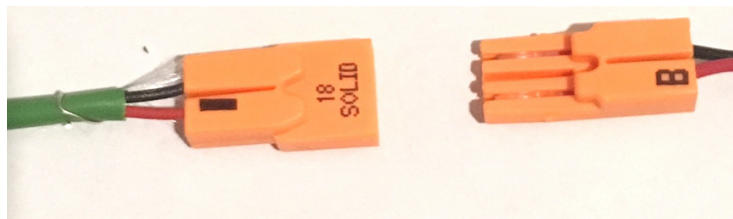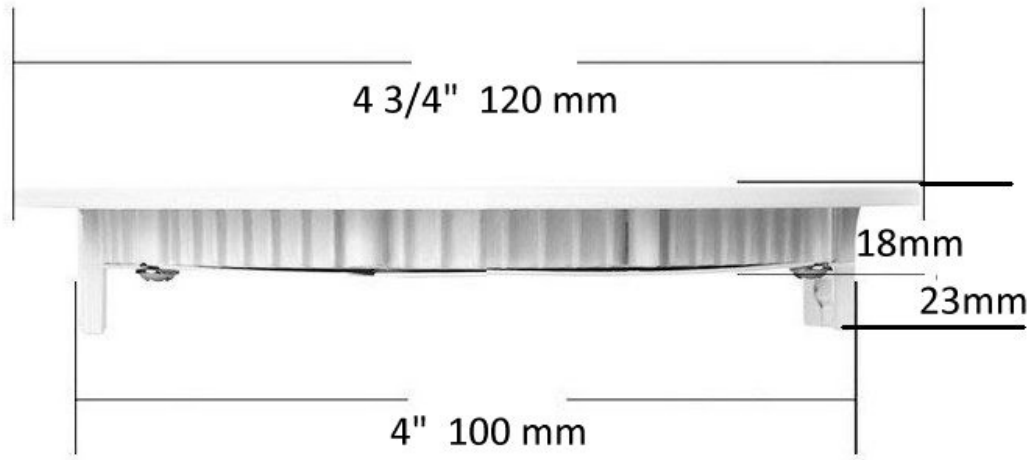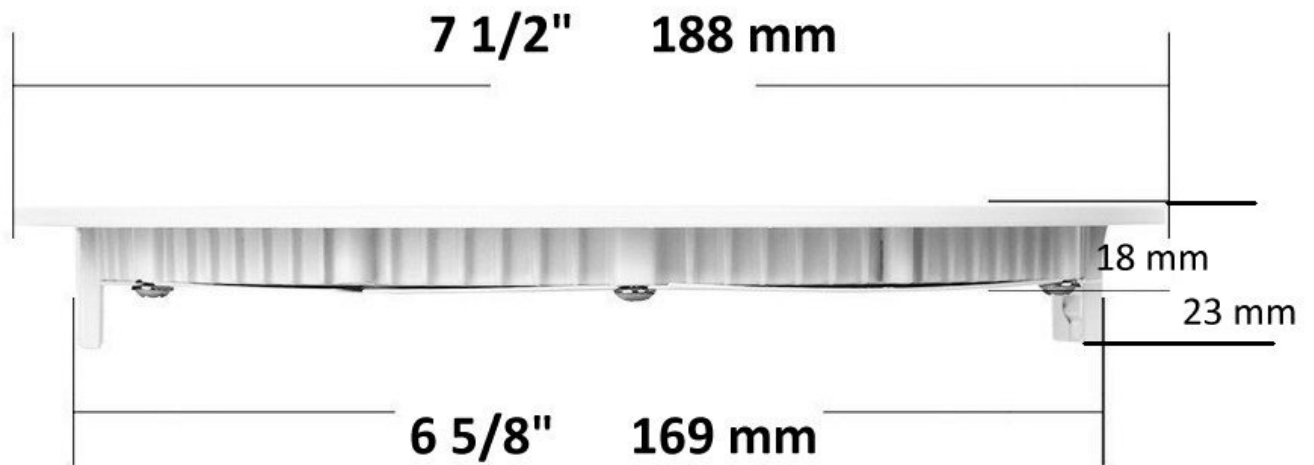

Ideal 30-082 type connector included

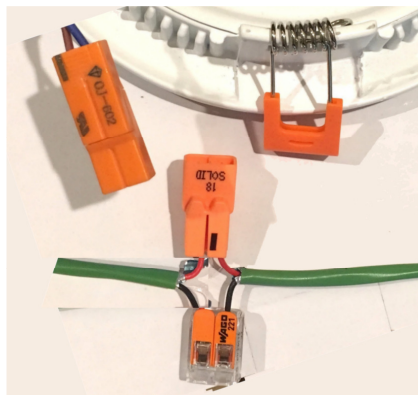

Series Wiring